

# KSS SERIES - Universal/Industrial/T5/T8

reflect-a-light®

## Econo Strip Kit

✓ Adjustable Bracket ✓ Universal Lamps ✓ Low Ceilings

### Application

- Warehouses
- Aisles
- Retail

### Benefits

- Ideal Photometry
- Up to 90% Energy Savings
- EPACT and Utility Rebates

### Features

- Toolless Ballast Access
- 25 Year Reflector Warranty
- ETL Certified

### Photometry


- 2-Lamp 4' T8 - KSS-02B04-SA
- Efficiency: 92.5%
- 0-DEG: 1.3
- 90-DEG: 1.2
- Report Number: 16549

### Design

- Reflector Dimensions: 47.86" x 6.00" x 0.50"
- Reflectors produced on high speed roll form for consistent high quality 4" - 5" kits
- One-piece adjustable center bracket for 1, 2, or 3 lamps
- Quarter turn reflector design
- Sockets snap-in & twist locking

Existing Fixture	Input Watts	System Lumens
4-Lamp F40 T12	192	9120
2-Lamp F40 T12	96	4560
4-Lamp F34 T12	144	7930
2-Lamp F34 T12	72	3960
Retrofit Options	Input Watts	System Lumens
2-Lamp F32 T8 Normal	57	5192
2-Lamp F32 T8 Low	51	4602
2-Lamp F32 T8 High	75	6961
2-Lamp F28 T8 HE/Normal	49	4654
2-Lamp F28 T8 HE/Low	43	4119
2-Lamp F28 T8 HE/High	66	6152

Housing not included

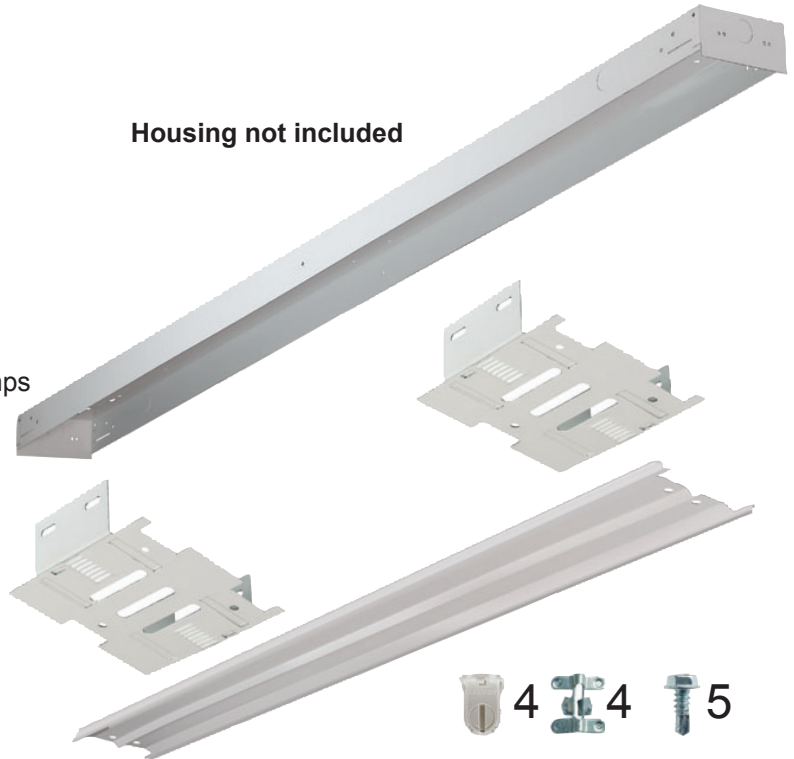

shown above: Reflector 1 Brackets 2

\*Lamp/ballast information provided from GE based on Proline ballast and F32T8/SPX41/ECO lamps.  
High efficient system based on GE Ultra Max ballast and F28T8/SPX41/ECO lamps

### Kit Ordering Guide Example



## KSS-UB04-SA-FLS

Series	Lamps	Wattage	Length	Material	Sockets
KSS	U - Universal	B - T8 C - T5	02 - 2' 03 - 3' 04 - 4' 06 - 6' 08 - 8'	EA - 95% Enhanced Alum. SA - 86% Specular Alum. WA - 91% White Alum.	FLS - Shunted FLN - Non Shunted



Industry Leader in  
Customization + Lead Times  
for Over 25 Years

VIDALIA, GA  
1-800-537-1629

